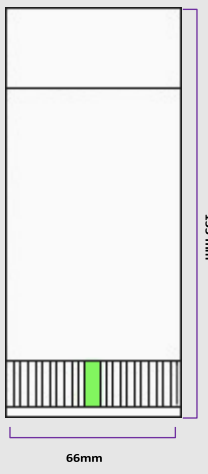
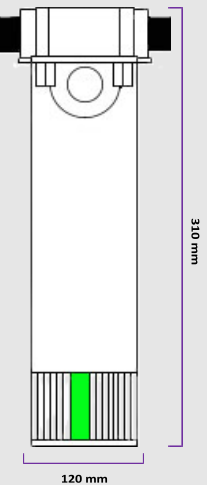
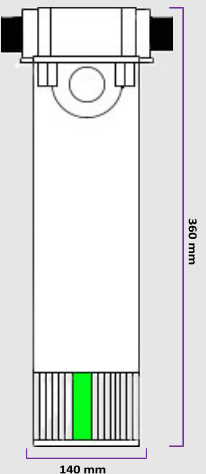
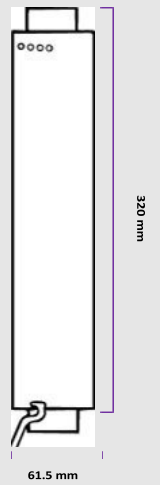


Atlas UV LED Systems

	7 LPM	15 LPM	25 LPM	50 LPM
Main Material	PP, Aluminium alloy	PP, Aluminium alloy	PP, Aluminium alloy	Acero Inox 304
Electrical Supply	100V-240V 50/60Hz	100V-240V 50/60Hz	100V-240V 50/60Hz	100V-240V 50/60Hz
Power	10.5W	17W	23W	50W
Output Voltage	24 Vdc 1A	24 Vdc 1.5A	24 Vdc 2A	24 Vdc 2.5A
Working Temperature	2 °C—65 °C	2 °C—65 °C	2 °C—65 °C	5 °C—55 °C
Pressure	0.8 MPa	0.8 MPa	0.8 MPa	2 MPa (20 bar)
Connections	3/8"	1/2"	3/4"	BSPP 1" (G1)
Working flow of osmosed water	7 L/min	15 L/min	25 L/min	50 L/min
Working flow of filtered water	3-5 L/min	7-11 L/min	12-18 L/min	37 L/min
Minimum flow required	0.5 L/min	2 L/min	3 L/min	7 L/min
Sterilization Rate	>99.9 (E.Coli) @ <7 LPM	>99.9 (E.Coli) @ <15 LPM	>99.9 (E.Coli) @ <25 LPM	>99.9 (E.Coli)
Service Life	3000Hrs	3000Hrs	3000Hrs	5000Hrs
Grade Waterproof	X7	X7	X7	X6
Dimensions				

UVO3,

Suite 2, Clare Hall
Parsons Green,
St Ives,
Cambridgeshire, PE27 4WY

sales@uvo3.co.uk

01480 355446

www.uvo3.co.uk

UVO3
THE UV DISINFECTION SPECIALISTS